

SASSO 1.5

round

recessed



Project/Type

Date



Round recessed spotlight; tool-free installation in mounting set with trim and ball catch system; surface painted; can be installed in various mounting sets; choose between adjustable or downlighted symmetric/asymmetric light distribution; symmetric light distribution models: precise beam thanks to a high-quality lens system; asymmetric light distribution models: high-quality reflector with micro-faceted, aluminum-vaporized surface; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with excellent color rendering

Luminaire characteristic	ceiling, recessed tilt max 30° rotation 360° up to 100 lm/W front IP40, back IP20
LED	2700 K, 3000 K, 4000 K CRI ≥ 90 L80 / 50 000 h initial MacAdam ≤ 2 SDCM
Optical	spot, medium, flood lens UGR < 16, ≥ 65° < 3000 cd/m² wallwasher reflector wallwasher floor reflector
Material	inset: die-cast aluminum reflector: polycarbonate housing: die-cast aluminum, steel
Mounting	remodel, new construction with plaster frame, new construction with housing for insulated ceiling or Chicago Plenum
Electrical	high efficiency LED driver with a lifetime of 50 000 hours, 120V or 277V
Dimming	0-10V (120-277V), range 5-100% leading edge (TRIAC, 120V only), range 5-100%.
Finish	inset: traffic white, matt silver, jet black, gold dust trim: white, black
Warranty	5 year limited warranty

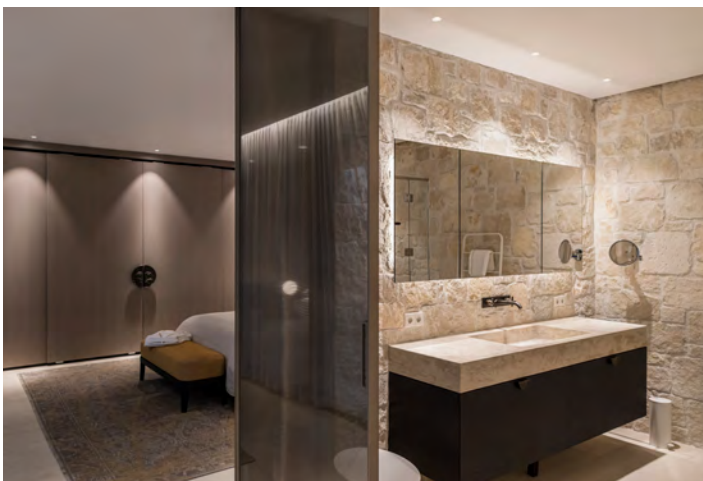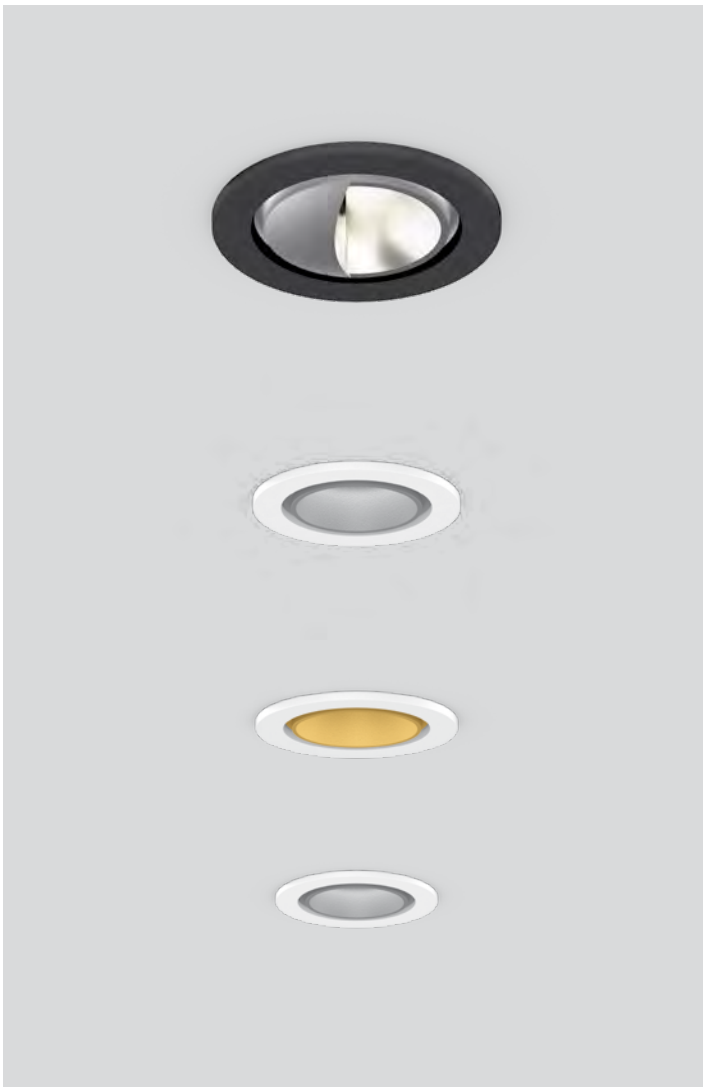

SASSO 1.5

round

recessed

Project / Type

Date

Order information

Range	Shape	Mounting	LED	Power	Application	Driver	Type	Optic beam	Optic type	Finish inset	Finish trim		
SA15 SASSO 1.5	R1 round	RT recessed trim	279 2700K CRI 90	S standard power	R remodel	VU 0-10V 120-277V UNV	F downlight	S spot	L lens	W traffic white	W white		
			309 3000K CRI 90		N new construction					T2 TRIAC 120V	M medium	S matt silver	B black
			409 4000K CRI 90		I insulated ceiling housing						F flood	B jet black	
				C Chicago Plenum housing		A adjustable		S spot	L lens	G gold dust			
				H high power	I insulated ceiling housing			M medium					
				C Chicago Plenum housing				F flood					
								W wallwasher	V wallwasher	R reflector			
									Z wallwasher floor				

SASSO 1.5

round

recessed


Project/Type

Date


Dimensions

SASSO 1.5 round



downlight




adjustable



wallwasher



wallwasher floor



SASSO 1.5

round


recessed

Project / Type

Date


Photometric data

SASSO 1.5 round downlight




SASSO 1.5 round downlight spot

Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	254 lm	58 lm/W
		3000 K	274 lm	62 lm/W
		4000 K	274 lm	62 lm/W
high power	6.2 W	2700 K	372 lm	60 lm/W
		3000 K	401 lm	64 lm/W
		4000 K	401 lm	64 lm/W



SASSO 1.5 round downlight flood


Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	263 lm	61 lm/W
		3000 K	283 lm	66 lm/W
		4000 K	283 lm	66 lm/W
high power	6.2 W	2700 K	386 lm	62 lm/W
		3000 K	415 lm	67 lm/W
		4000 K	415 lm	67 lm/W



SASSO 1.5 round downlight medium


Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	260 lm	59 lm/W
		3000 K	280 lm	63 lm/W
		4000 K	280 lm	63 lm/W
high power	6.2 W	2700 K	381 lm	61 lm/W
		3000 K	410 lm	66 lm/W
		4000 K	410 lm	66 lm/W

SASSO 1.5 round adjustable




SASSO 1.5 round adjustable spot

Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	269 lm	61 lm/W
		3000 K	289 lm	65 lm/W
		4000 K	289 lm	65 lm/W
high power	6.2 W	2700 K	384 lm	62 lm/W
		3000 K	413 lm	67 lm/W
		4000 K	413 lm	67 lm/W



SASSO 1.5 round adjustable flood


Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	271 lm	61 lm/W
		3000 K	292 lm	66 lm/W
		4000 K	292 lm	66 lm/W
high power	6.2 W	2700 K	387 lm	62 lm/W
		3000 K	417 lm	67 lm/W
		4000 K	417 lm	67 lm/W



SASSO 1.5 round adjustable medium

Type	Power	LED	Luminous flux	Efficacy
standard power	4.4 W	2700 K	276 lm	63 lm/W
		3000 K	297 lm	67 lm/W
		4000 K	297 lm	67 lm/W
high power	6.2 W	2700 K	395 lm	64 lm/W
		3000 K	425 lm	68 lm/W
		4000 K	425 lm	68 lm/W


SASSO 1.5 round wallwasher



SASSO 1.5 round wallwasher

Type	Power	LED	Luminous flux	Efficacy
standard power	6.3 W	2700 K	372 lm	59 lm/W
		3000 K	404 lm	64 lm/W
		4000 K	420 lm	67 lm/W
high power	9.9 W	2700 K	529 lm	54 lm/W
		3000 K	575 lm	58 lm/W
		4000 K	597 lm	61 lm/W

SASSO 1.5 round wallwasher floor



SASSO 1.5 round wallwasher floor

Type	Power	LED	Luminous flux	Efficacy
standard power	7.1 W	2700 K	653 lm	92 lm/W
		3000 K	680 lm	96 lm/W
		4000 K	707 lm	100 lm/W
high power	10.8 W	2700 K	962 lm	89 lm/W
		3000 K	1000 lm	93 lm/W
		4000 K	1040 lm	96 lm/W

SASSO 1.5

round

recessed


Project/Type

Date

Remodel

Housing for new or existing ceiling structure. Suitable for non-insulated ceilings (sheetrock, or paneling). Fixture is ready for remodeling installation. Housing can be shipped separately.

Ceiling thickness
up to 1" (25.4 mm)

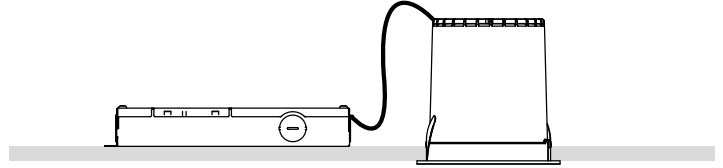

Type	Cut-out dimension	Installation depth
SASSO 1.5 round	ø 2 3/16" (ø 56mm)	3 1/8" (79mm)




For power supply installation keep clearane of 300 mm (1 ft.) behind the ceiling

Housing for insulated ceiling or chicago plenum

Housing with hanger bars system for new construction installations. Suitable for insulated ceilings, chicago plenum and airtight applications. Housing can be shipped seperately.

Ceiling thickness
up to 1" (25.4 mm)

Hanger bars adjustment
16" to 24" (406 to 610mm)

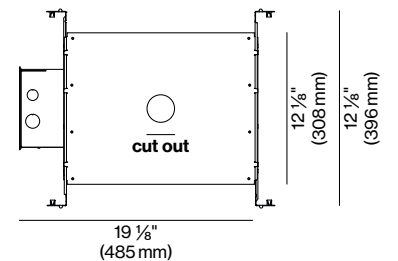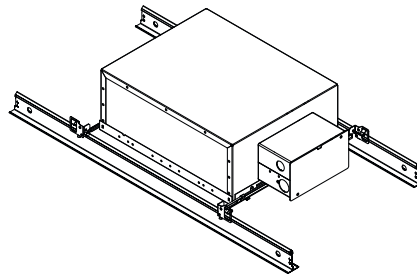

Type	Cut-out dimension	Installation depth
SASSO 1.5 round	ø 2 3/16" (ø 56mm)	5 9/16" (151mm)

SASSO 2.5

round/square

recessed


Project/Type

Date



Round and square recessed spotlight; installation without tools in mounting set (trimless or with trim) with ball catch system; surface lacquered; installation possible in different housings; choice of adjustable / downlighted symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise radiation characteristic due to high quality lens system; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (adjustable and downlight); no multiple shadows; efficient LEDs with very good color rendering

Luminaire characteristic	ceiling, recessed tilt max 30° rotation 360° up to 110lm/W front IP40, back IP20
LED	2700K, 3000K, 3500K, 4000K, CWD CRI ≥ 90 L80/50000h initial MacAdam ≤ 2 SDCM
Optical	spot, medium, flood, wide flood lens UGR < 16, ≥ 65° < 3000 cd/m² wallwasher reflector wallwasher floor reflector
Material	inset: die-cast aluminum reflector: polycarbonate housing: die-cast aluminum, steel
Mounting	remodel, new construction with plaster frame, new construction with housing for insulated ceiling or Chicago Plenum
Electrical	high efficiency LED driver with a lifetime of 50000 hours, 120V or 277V
Dimming	0-10V (120-277V), range 5-100% leading edge (TRIAC, 120V only), range 5-100%.
Finish	inset: traffic white, matt silver, jet black, gold dust trim: white, black
Warranty	5 year limited warranty

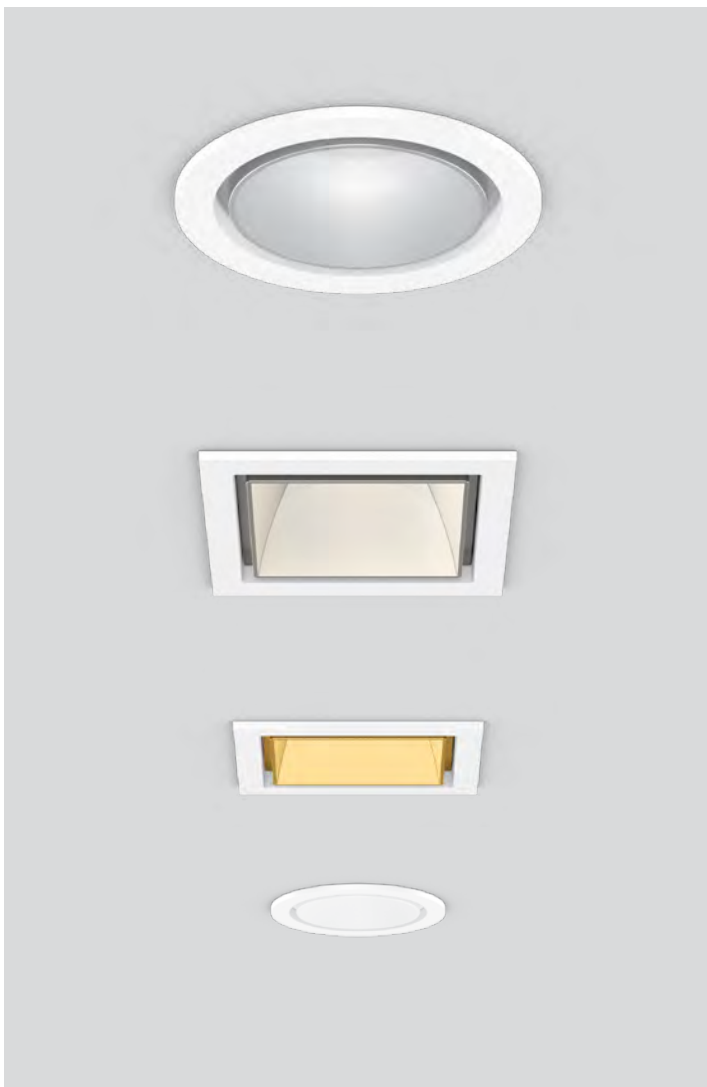

SASSO 2.5

round/square

recessed

Project/Type

Date

Order information

Range	Shape	Mounting	LED	Power	Application	Driver	Type	Optic beam	Optic type	Finish inset	Finish trim	
SA25 SASSO 2.5	R1 round	RT recessed trim	279 2700K CRI 90	S standard power	R remodel	VU 0-10V 120-277V UNV	F downlight	S spot	L lens	W traffic white	W white	
			309 3000K CRI 90		N new construction			T2 TRIAC 120V		M medium	S matt silver	B black
			359 3500K CRI 90		I insulated ceiling housing					F flood	B jet black	
			409 4000K CRI 90		C Chicago Plenum housing					W wide flood	G gold dust	
			CWD color warm dimming 1800-3000K		H high power			I insulated ceiling housing		A adjustable (only available for round shape)	S spot	L lens
			C Chicago Plenum housing		M medium							
					F flood							
					W wide flood							
						W wallwasher	V wallwasher	R reflector				
							Z wallwasher floor					

SASSO 2.5

round/square


recessed

Project/Type


Date

Dimensions

SASSO 2.5 round

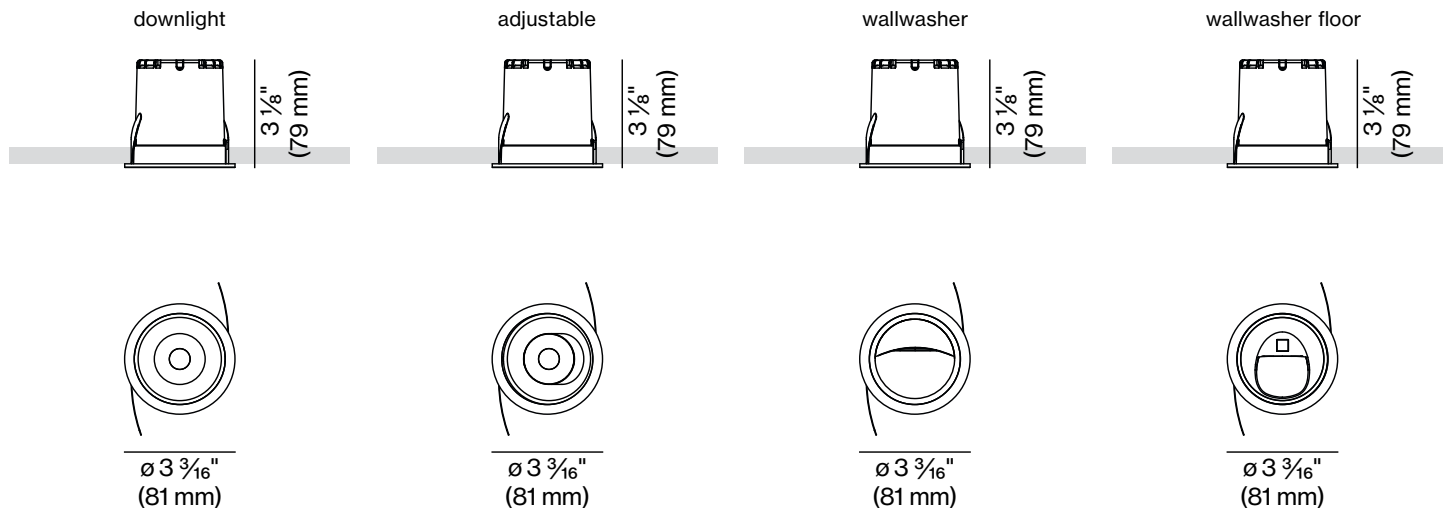

SASSO 2.5 square

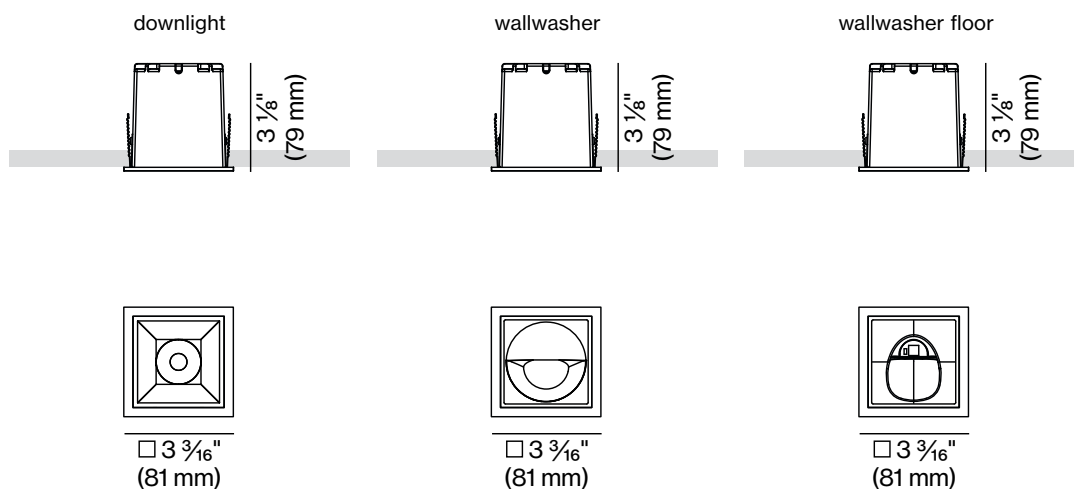

SASSO 2.5

round/square

recessed

Project/Type


Date

Installation information

Remodel

Housing for new or existing ceiling structure. Suitable for non-insulated ceilings (sheetrock, or paneling). Fixture is ready for remodeling installation. Housing can be shipped separately.

Ceiling thickness
up to 1" (25.4 mm)

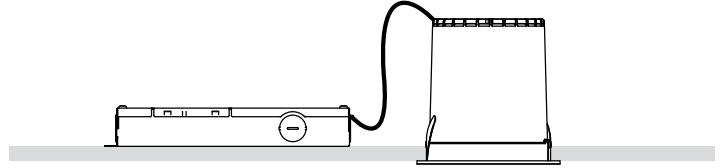

Type	Cut-out dimension	Installation depth
SASSO 2.5 round	$\varnothing 2 \frac{7}{8}"$ ($\varnothing 73\text{mm}$)	$3 \frac{1}{8}"$ (79mm)
SASSO 2.5 square	$2 \frac{7}{8}" \times 2 \frac{7}{8}"$ (73×73mm)	$3 \frac{1}{8}"$ (79mm)



For power supply installation keep clearance of 300 mm (1 ft.) behind the ceiling

Housing for insulated ceiling or chicago plenum

Housing with hanger bars system for new construction installations. Suitable for insulated ceilings, chicago plenum and airtight applications. Housing can be shipped separately.

Ceiling thickness
up to 1" (25.4 mm)

Hanger bars adjustment
16" to 24" (406 to 610mm)

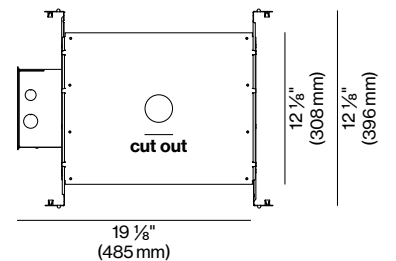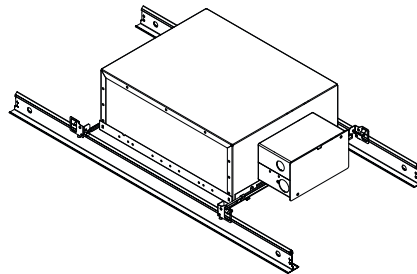

Type	Cut-out dimension	Installation depth
SASSO 2.5 round	$\varnothing 2 \frac{7}{8}"$ ($\varnothing 73\text{mm}$)	$5 \frac{15}{16}"$ (151mm)
SASSO 2.5 square	$2 \frac{7}{8}" \times 2 \frac{7}{8}"$ (73×73mm)	$5 \frac{15}{16}"$ (151mm)

SASSO 2.5

round/square


recessed

Project/Type

Date


Photometric data

SASSO 2.5 round downlight




SASSO 2.5 round downlight spot

Type	Power	LED	Luminous flux	Efficacy
standard power	8.1W	2700 K	601lm	74lm/W
		3000 K	621lm	77lm/W
		4000 K	654lm	81lm/W
high power	12.8 W	2700 K	896 lm	70lm/W
		3000 K	925 lm	72lm/W
		4000 K	974 lm	76lm/W




SASSO 2.5 round downlight flood

Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	670 lm	84 lm/W
		3000 K	695 lm	87 lm/W
		4000 K	725 lm	91 lm/W
high power	12.5 W	2700 K	998 lm	80 lm/W
		3000 K	1040 lm	83 lm/W
		4000 K	1080 lm	86 lm/W



SASSO 2.5 round downlight medium


Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	704 lm	88 lm/W
		3000 K	730 lm	92 lm/W
		4000 K	762 lm	96 lm/W
high power	12.5 W	2700 K	1050 lm	84 lm/W
		3000 K	1090 lm	87 lm/W
		4000 K	1140 lm	91 lm/W



SASSO 2.5 round downlight wide flood


Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	703 lm	88 lm/W
		3000 K	730 lm	92 lm/W
		4000 K	762 lm	96 lm/W
high power	12.5 W	2700 K	1050 lm	84 lm/W
		3000 K	1090 lm	87 lm/W
		4000 K	1130 lm	91 lm/W

SASSO 2.5 round adjustable




SASSO 2.5 round adjustable spot

Type	Power	LED	Luminous flux	Efficacy
standard power	8.1W	2700 K	590 lm	73lm/W
		3000 K	610 lm	75lm/W
		4000 K	642 lm	79lm/W
high power	12.8 W	2700 K	879 lm	69lm/W
		3000 K	908 lm	71lm/W
		4000 K	956 lm	75lm/W




SASSO 2.5 round adjustable flood

Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	666 lm	84 lm/W
		3000 K	691 lm	87 lm/W
		4000 K	721 lm	91 lm/W
high power	12.5 W	2700 K	992 lm	79 lm/W
		3000 K	1030 lm	82 lm/W
		4000 K	1070 lm	86 lm/W



SASSO 2.5 round adjustable medium


Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	701lm	88lm/W
		3000 K	727 lm	91lm/W
		4000 K	759 lm	95lm/W
high power	12.5 W	2700 K	1040 lm	83lm/W
		3000 K	1080 lm	87lm/W
		4000 K	1130 lm	90lm/W



SASSO 2.5 round adjustable wide flood


Type	Power	LED	Luminous flux	Efficacy
standard power	8.0 W	2700 K	702lm	88lm/W
		3000 K	728 lm	94lm/W
		4000 K	760 lm	96lm/W
high power	12.5 W	2700 K	1050 lm	84 lm/W
		3000 K	1090 lm	87 lm/W
		4000 K	1130 lm	91 lm/W

SASSO 2.5 round wallwasher



SASSO 2.5 round wallwasher

Type	Power	LED	Luminous flux	Efficacy
standard power	6.1W	2700 K	405 lm	67lm/W
		3000 K	440 lm	72lm/W
		4000 K	457 lm	75lm/W
high power	9.5 W	2700 K	576 lm	61lm/W
		3000 K	626 lm	66lm/W
		4000 K	650 lm	68lm/W



SASSO 2.5 round wallwasher floor

Type	Power	LED	Luminous flux	Efficacy
standard power	6.9 W	2700 K	686 lm	100 lm/W
		3000 K	715 lm	104 lm/W
		4000 K	744 lm	109 lm/W
high power	10.4 W	2700 K	1000 lm	96 lm/W
		3000 K	1050 lm	100 lm/W
		4000 K	1090 lm	104 lm/W

SASSO 2.5

round/square


recessed

Project/Type

Date


Photometric data

SASSO 2.5 square downlight




SASSO 2.5 square downlight spot

Type	Power	LED	Luminous flux	Efficacy
standard power	8.1W	2700 K	594lm	74 lm/W
		3000 K	613lm	76 lm/W
		4000 K	646lm	80 lm/W
high power	12.8W	2700 K	885lm	69 lm/W
		3000 K	914lm	72 lm/W
		4000 K	962lm	75 lm/W




SASSO 2.5 square downlight flood

Type	Power	LED	Luminous flux	Efficacy
standard power	8.0W	2700 K	671lm	84 lm/W
		3000 K	696lm	88 lm/W
		4000 K	726lm	91 lm/W
high power	12.5W	2700 K	999lm	80 lm/W
		3000 K	1040lm	83 lm/W
		4000 K	1080lm	86 lm/W



SASSO 2.5 square downlight medium


Type	Power	LED	Luminous flux	Efficacy
standard power	8.0W	2700 K	705lm	89 lm/W
		3000 K	732lm	92 lm/W
		4000 K	764lm	96 lm/W
high power	12.5W	2700 K	1050lm	84 lm/W
		3000 K	1090lm	87 lm/W
		4000 K	1140lm	91 lm/W



SASSO 2.5 square downlight wide flood

Type	Power	LED	Luminous flux	Efficacy
standard power	8.0W	2700 K	703lm	88 lm/W
		3000 K	729lm	92 lm/W
		4000 K	761lm	96 lm/W
high power	12.5W	2700 K	1050lm	84 lm/W
		3000 K	1090lm	87 lm/W
		4000 K	1130lm	91 lm/W


SASSO 2.5 square wallwasher



SASSO 2.5 square wallwasher

Type	Power	LED	Luminous flux	Efficacy
standard power	6.1W	2700 K	417lm	69 lm/W
		3000 K	453lm	75 lm/W
		4000 K	471lm	77 lm/W
high power	9.5W	2700 K	593lm	62 lm/W
		3000 K	644lm	68 lm/W
		4000 K	670lm	70 lm/W

SASSO 2.5 square wallwasher floor



SASSO 2.5 square wallwasher floor

Type	Power	LED	Luminous flux	Efficacy
standard power	6.9W	2700 K	694lm	101 lm/W
		3000 K	723lm	106 lm/W
		4000 K	752lm	110 lm/W
high power	10.4W	2700 K	1010lm	97 lm/W
		3000 K	1060lm	101 lm/W
		4000 K	1100lm	105 lm/W

SASSO 4.0

round/square

recessed

Project/Type

Date



Round and square recessed spotlight; installation without tools in mounting set (trimless or with trim) with ball catch system; surface lacquered; installation possible in different housings; choice of adjustable / downlighted symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise radiation characteristic due to high quality lens system; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (adjustable and downlight); no multiple shadows; efficient LEDs with very good color rendering

Luminaire characteristic ceiling, recessed
tilt max 30°
rotation 360°
up to 111lm/W
front IP40, back IP20

LED 2700K, 3000K, 3500K, 4000K
CRI ≥ 90
L80/50000h
initial MacAdam ≤ 2 SDCM

Optical spot, medium, flood, wide flood lens
UGR < 16, ≥ 65° < 3000 cd/m²
wallwasher reflector
wallwasher floor reflector

Material inset: die-cast aluminum
reflector: polycarbonate
housing: die-cast aluminum, steel

Mounting Remodel, new construction with plaster frame,
new construction with housing for insulated
ceiling or Chicago Plenum (page 5-6).

Electrical High efficiency LED driver with a lifetime of
50000 hours, 120V or 277V

Dimming 0-10V (120-277V), range 5-100%
leading edge (TRIAC, 120V only), range 5-100%.
DALI (120-277V), range 0.1-100%.

Finish inset: traffic white, matt silver, jet black, gold dust
trim: white, black

Warranty 5 year limited warranty



SASSO 4.0

round/square

recessed

Project/Type

Date

Order information

Range	Shape	Mounting	LED	Power	Application	Driver	Type	Optic beam	Optic type	Finish inset	Finish trim		
SA40 SASSO 4.0	R1 round	RT recessed trim	279 2700K CRI 90	S standard power	R remodel	VU 0-10V 120-277V UNV	F downlight	S spot	L lens	W traffic white	W white		
			309 3000K CRI 90		N new construction			T2 TRIAC 120V		M medium	S matt silver	B black	
			359 3500K CRI 90		I insulated ceiling housing			F flood	B jet black				
			409 4000K CRI 90		C Chicago Plenum housing			W wide flood	G gold dust				
				H high power	I insulated ceiling housing			A adjustable (only available for round shape)	S spot	L lens			
					C Chicago Plenum housing			M medium					
								F flood					
									W wide flood				
									W wallwasher	V wallwasher	R reflector		
										Z wallwasher floor			

SASSO 4.0

round/square


recessed

Project/Type


Date

Dimensions

SASSO 4.0 round

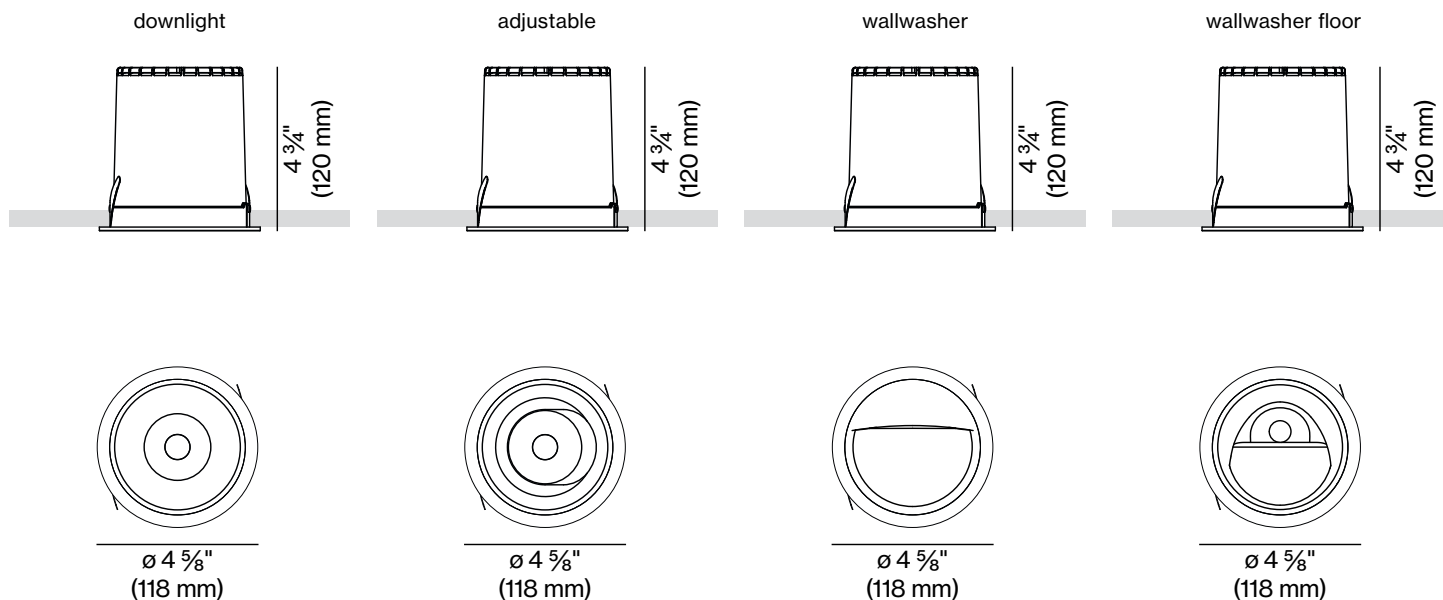

SASSO 4.0 square

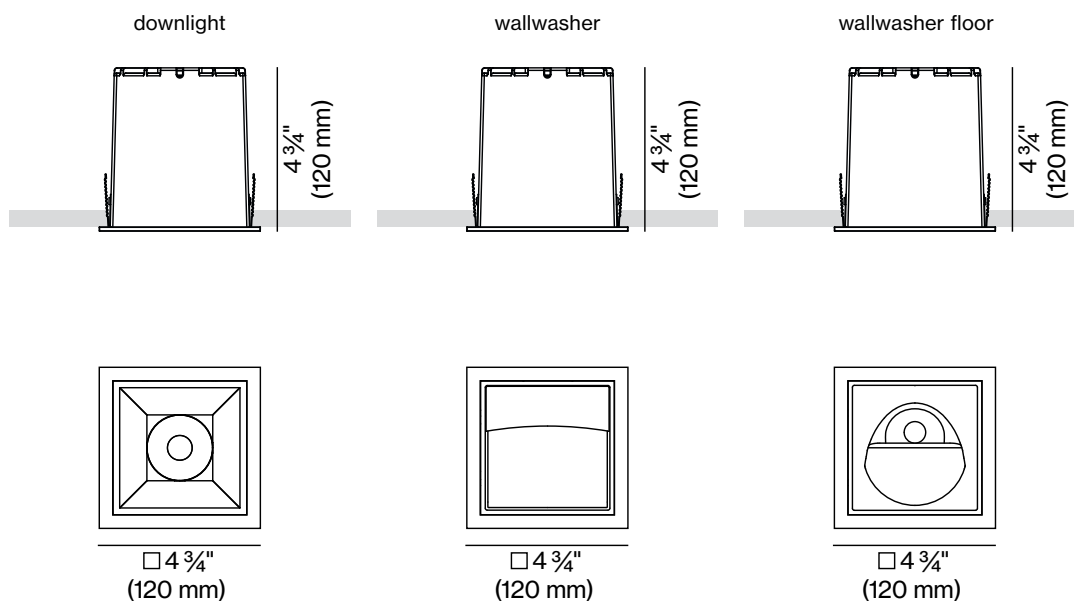

SASSO 4.0

round/square

recessed

Project/Type


Date

Installation

Remodel

Housing for new or existing ceiling structure. Suitable for non-insulated ceilings (sheetrock, or paneling). Fixture is ready for remodeling installation. Housing can be shipped separately.

Ceiling thickness
up to 1" (25.4 mm)

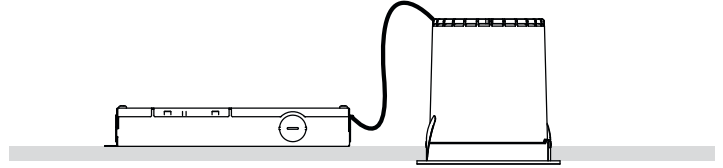

Type	Cut-out dimension	Installation depth
SASSO 4.0 round	ø 4 1/4" (ø 108 mm)	4 3/4" (120 mm)
SASSO 4.0 square	4 7/16" × 4 7/16" (112 × 112 mm)	4 3/4" (120 mm)



For power supply installation keep clearance of 300 mm (1 ft.) behind the ceiling

Housing for insulated ceiling or chicago plenum

Housing with hanger bars system for new construction installations. Suitable for insulated ceilings, chicago plenum and airtight applications. Housing can be shipped separately.

Ceiling thickness
up to 1" (25.4 mm)

Hanger bars adjustment
16" to 24" (406 to 610mm)

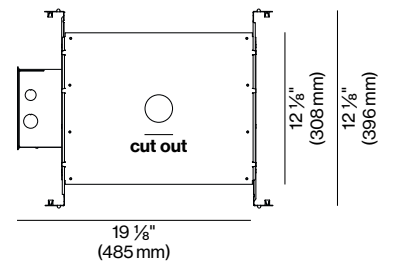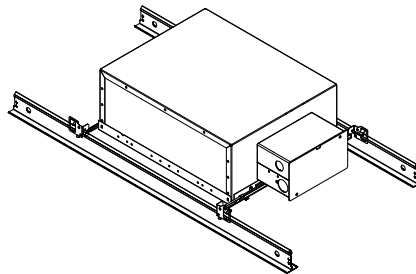

Type	Cut-out dimension	Installation depth
SASSO 4.0 round	ø 4 1/4" (ø 108 mm)	5 15/16" (151 mm)
SASSO 4.0 square	4 7/16" × 4 7/16" (112 × 112 mm)	5 15/16" (151 mm)

SASSO 4.0

round/square


recessed

Project / Type

Date


Photometric data

SASSO 4.0 round downlight




SASSO 4.0 round downlight spot

Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1100 lm	81lm/W
		3000 K	1140 lm	85lm/W
		4000 K	1200 lm	89lm/W
high power	26.7 W	2700 K	1990 lm	75lm/W
		3000 K	2070 lm	78lm/W
		4000 K	2170 lm	81lm/W




SASSO 4.0 round downlight flood

Type	Power	LED	Luminous flux	Efficacy
standard power	17.9 W	2700 K	1610 lm	90lm/W
		3000 K	1680 lm	94lm/W
		4000 K	1750 lm	98lm/W
high power	26.7 W	2700 K	2220 lm	83lm/W
		3000 K	2300 lm	86lm/W
		4000 K	2410 lm	90lm/W



SASSO 4.0 round downlight medium


Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1110 lm	82lm/W
		3000 K	1150 lm	85lm/W
		4000 K	1200 lm	89lm/W
high power	26.7 W	2700 K	2000 lm	75lm/W
		3000 K	2080 lm	78lm/W
		4000 K	2180 lm	82lm/W



SASSO 4.0 round downlight wide flood


Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1250 lm	93lm/W
		3000 K	1300 lm	96lm/W
		4000 K	1360 lm	101lm/W
high power	26.7 W	2700 K	2270 lm	85lm/W
		3000 K	2360 lm	88lm/W
		4000 K	2470 lm	92lm/W

SASSO 4.0 round adjustable




SASSO 4.0 round adjustable spot

Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1110 lm	82lm/W
		3000 K	1160 lm	86lm/W
		4000 K	1210 lm	90lm/W
high power	26.7 W	2700 K	2020 lm	75lm/W
		3000 K	2100 lm	78lm/W
		4000 K	2190 lm	82lm/W




SASSO 4.0 round adjustable flood

Type	Power	LED	Luminous flux	Efficacy
standard power	17.9 W	2700 K	1610 lm	90lm/W
		3000 K	1680 lm	94lm/W
		4000 K	1760 lm	98lm/W
high power	26.7 W	2700 K	2220 lm	83lm/W
		3000 K	2310 lm	86lm/W
		4000 K	2420 lm	91lm/W



SASSO 4.0 round adjustable medium


Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1120 lm	82lm/W
		3000 K	1160 lm	86lm/W
		4000 K	1210 lm	90lm/W
high power	26.7 W	2700 K	2020 lm	76lm/W
		3000 K	2100 lm	79lm/W
		4000 K	2190 lm	82lm/W



SASSO 4.0 round adjustable wide flood


Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1270 lm	94lm/W
		3000 K	1320 lm	98lm/W
		4000 K	1380 lm	102lm/W
high power	26.7 W	2700 K	2300 lm	86lm/W
		3000 K	2390 lm	90lm/W
		4000 K	2500 lm	94lm/W

SASSO 4.0 round wallwasher



SASSO 4.0 round wallwasher

Type	Power	LED	Luminous flux	Efficacy
standard power	14.1 W	2700 K	1260 lm	89lm/W
		3000 K	1310 lm	93lm/W
		4000 K	1360 lm	96lm/W
high power	27.8 W	2700 K	2280 lm	82lm/W
		3000 K	2370 lm	85lm/W
		4000 K	2470 lm	89lm/W



SASSO 4.0 round wallwasher floor

Type	Power	LED	Luminous flux	Efficacy
standard power	13.1 W	2700 K	1320 lm	101lm/W
		3000 K	1410 lm	107lm/W
		4000 K	1450 lm	110lm/W
high power	25.4 W	2700 K	2380 lm	94lm/W
		3000 K	2540 lm	100lm/W
		4000 K	2610 lm	103lm/W

SASSO 4.0

round/square


recessed

Project/Type

Date


Photometric data

SASSO 4.0 square downlight




SASSO 4.0 square downlight spot

Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1140 lm	84 lm/W
		3000 K	1190 lm	88 lm/W
		4000 K	1240 lm	92 lm/W
high power	26.7 W	2700 K	2070 lm	77 lm/W
		3000 K	2150 lm	80 lm/W
		4000 K	2250 lm	84 lm/W




SASSO 4.0 square downlight flood

Type	Power	LED	Luminous flux	Efficacy
standard power	17.9 W	2700 K	1660 lm	93 lm/W
		3000 K	1730 lm	97 lm/W
		4000 K	1810 lm	101 lm/W
high power	26.7 W	2700 K	2290 lm	86 lm/W
		3000 K	2380 lm	89 lm/W
		4000 K	2490 lm	93 lm/W



SASSO 4.0 square downlight medium


Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1150 lm	85 lm/W
		3000 K	1190 lm	88 lm/W
		4000 K	1250 lm	92 lm/W
high power	26.7 W	2700 K	2080 lm	78 lm/W
		3000 K	2160 lm	81 lm/W
		4000 K	2260 lm	85 lm/W



SASSO 4.0 square downlight wide flood

Type	Power	LED	Luminous flux	Efficacy
standard power	13.5 W	2700 K	1280 lm	95 lm/W
		3000 K	1330 lm	99 lm/W
		4000 K	1400 lm	103 lm/W
high power	26.7 W	2700 K	2320 lm	87 lm/W
		3000 K	2410 lm	90 lm/W
		4000 K	2520 lm	94 lm/W


SASSO 4.0 square wallwasher



SASSO 4.0 square wallwasher

Type	Power	LED	Luminous flux	Efficacy
standard power	14.1 W	2700 K	1290 lm	91 lm/W
		3000 K	1340 lm	95 lm/W
		4000 K	1400 lm	99 lm/W
high power	27.8 W	2700 K	2340 lm	84 lm/W
		3000 K	2430 lm	87 lm/W
		4000 K	2530 lm	91 lm/W

SASSO 4.0 square wallwasher floor



SASSO 4.0 square wallwasher floor

Type	Power	LED	Luminous flux	Efficacy
standard power	13.1 W	2700 K	1320 lm	101 lm/W
		3000 K	1410 lm	107 lm/W
		4000 K	1450 lm	111 lm/W
high power	25.4 W	2700 K	2390 lm	94 lm/W
		3000 K	2540 lm	100 lm/W
		4000 K	2620 lm	103 lm/W